


CODE KEY

thermocouple extension cable

Example:

P	/	ALM	/	AL	P	W	P	TW	K	-	12	-	20	-	KX
1		2		3	4	5	6	7	8		9		10		11

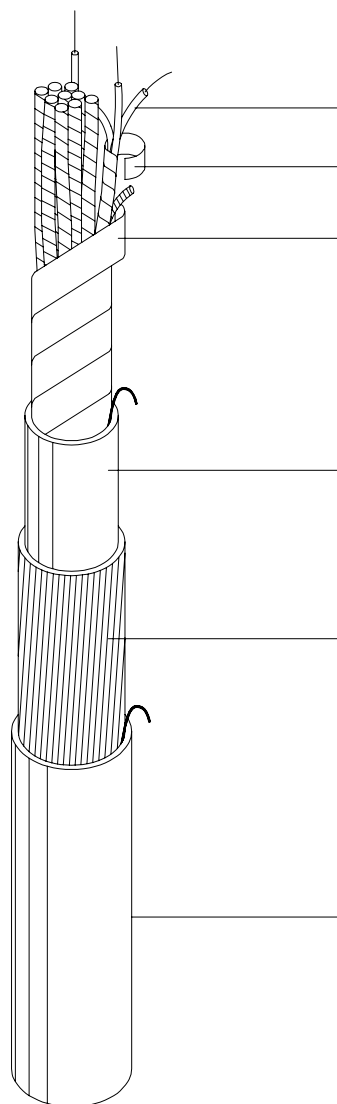

- 1 Conductor insulation PVC
- 2 Individual shield + drain wire
- 3 Overall shield + drain wire
- 4 PVC inner jacket (optional)
- 5 Galvanized steel wire armour
- 6 PVC outer jacket
- 7 Twisted conductors
- 8 Cable (more than 1 pair or triad)
- 9 No. of pairs or triads (on datasheet ☐, example: 12)
- 10 Conductor size in AWG
- 11 Chromel-alumel conductors



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet: <http://www.thermo-electric.nl>

F/002
Rev.00 08/03