



# MULTIPOINT INDICATION SYSTEM

## Dimensions (in mm):

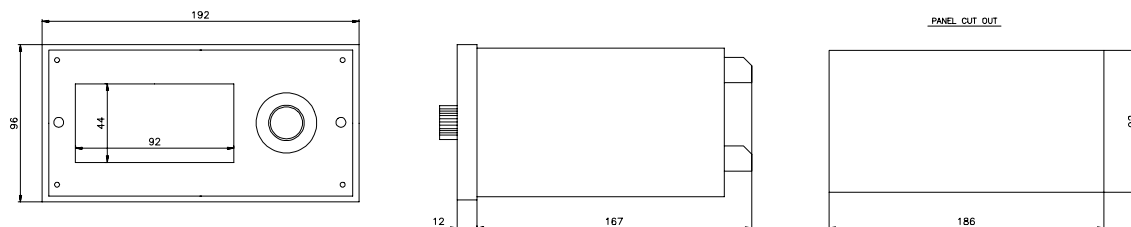

## Specials:

- Miniature panel inserts for thermocouple inputs at rear.
  - Standard panel inserts for thermocouple inputs.
- NOTE: 12, 18 and 23 points will have in that case a larger size housing (288 x 96 mm).
- 2,5 meter power cord with plug.
  - 6 or 12 miniature panel inserts at front.
  - 3HE high 19" rack mounting plate.
  - 3HE high 19" rack mounting plate with 2 panel cutout for SWT-11000.
  - Power on/off switch at rear or at front.
  - 24 points without off.
  - Other number of points, up to 24 points maximum.

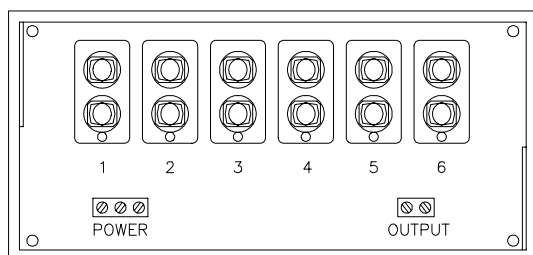

Rear panel of a SWT-11006...x-Indicator-special with a 6 standard jack inserts in correct calibration. Power connection (L, N, earth) with screw terminals, output, screw terminals.



**Thermo Electric**  
**P.O. Box 179**  
**2740 AD Waddinxveen**  
**The Netherlands**

Tel. : +31 (0)182 – 302 850  
Fax : +31 (0)182 – 302 777  
E-mail : [info@thermo-electric.nl](mailto:info@thermo-electric.nl)  
Internet : <http://www.thermo-electric.nl>

**J/315r**